



Software : by Martin J. King  
e-mail MJKing57@aol.com

Copyright 2011 by Martin J. King. All Rights Reserved.

Configuration : Extended Range Driver w/ Bass Driver Mounted on an Open Baffle

**Unit and Constant Definition**

cycle := 2·π·rad

Hz := cycle·sec<sup>-1</sup>

Air Density : ρ := 1.205·kg·m<sup>-3</sup>

Speed of Sound : c := 344·m·sec<sup>-1</sup>



**Part 1 : Thiele-Small Consistent Calculation**

**Detailed User Input** (Edit This Section and Input the Parameters for the System to be Analyzed)

Power := 1·watt (Input Power) Applied Voltage Reference ---> R<sub>ref</sub> := 8·Ω

Extended Range Driver Thiele / Small Parameters : Fostex FE-108ESigma

f<sub>d</sub> := 77·Hz V<sub>ad</sub> := 5.70·liter

R<sub>e</sub> := 6.8·Ω Q<sub>ed</sub> := 0.32

L<sub>vc</sub> := 0.0·mH Q<sub>md</sub> := 7.79

Bl := 5.2· $\frac{\text{newton}}{\text{amp}}$  Q<sub>td</sub> :=  $\left(\frac{1}{Q_{ed}} + \frac{1}{Q_{md}}\right)^{-1}$

S<sub>d</sub> := π·3.46<sup>2</sup>·cm<sup>2</sup> Q<sub>td</sub> = 0.307



Bass Driver Thiele / Small Parameters : Eminence Alpha 15" High Efficiency

f<sub>d</sub> := 41·Hz V<sub>ad</sub> := 260·liter

R<sub>e</sub> := 5.88·Ω Q<sub>ed</sub> := 1.53

L<sub>vc</sub> := 0.84·mH Q<sub>md</sub> := 7.23

Bl := 7.7· $\frac{\text{newton}}{\text{amp}}$  Q<sub>td</sub> :=  $\left(\frac{1}{Q_{ed}} + \frac{1}{Q_{md}}\right)^{-1}$

S<sub>d</sub> := 856.3·cm<sup>2</sup> Q<sub>td</sub> = 1.263



## Crossover Definition

For Even Order Crossovers : Type 1 = Linkwitz-Riley  
Type 2 = Bessel  
Type 3 = BEC  
Type 4 = Butterworth

### Low Pass Filter

$f_{LP} := 200 \cdot \text{Hz}$

$LP_{order} := 2$

$LP_{type} := 1$

### High Pass Filter

$f_{HP} := 400 \cdot \text{Hz}$

$HP_{order} := 2$

$HP_{type} := 4$

(Filter Frequency)

(Filter Order : 0, 1, 2, 3, or 4)

(Filter Type : 1, 2, 3, or 4 for even order only,  
for odd order this entry is ignored)

### Crossover Phase Connection

$LP_{phase} := 1$

$HP_{phase} := 1$

(Phase : 1 = in phase, -1 = out of phase)

### Low Frequency Boost

$LP_{boost} := 3.0 \text{ dB}$

### Sub High Pass Filter (Use to Limit Low Frequency Woofer Displacement)

$f_{sub} := 20 \cdot \text{Hz}$

$SHP_{order} := 0$

$SHP_{type} := 4$

(Filter Frequency)

(Filter Order : 0, 1, 2, 3, or 4)


(Filter Type : 1, 2, 3, or 4 for even order only,  
for odd order this entry is ignored)




**End of Detailed Input**

**End of Part 1 Input**

**OB Driver Impedances** (Red Curve - Woofer, Blue Curve - Extended Range Driver)

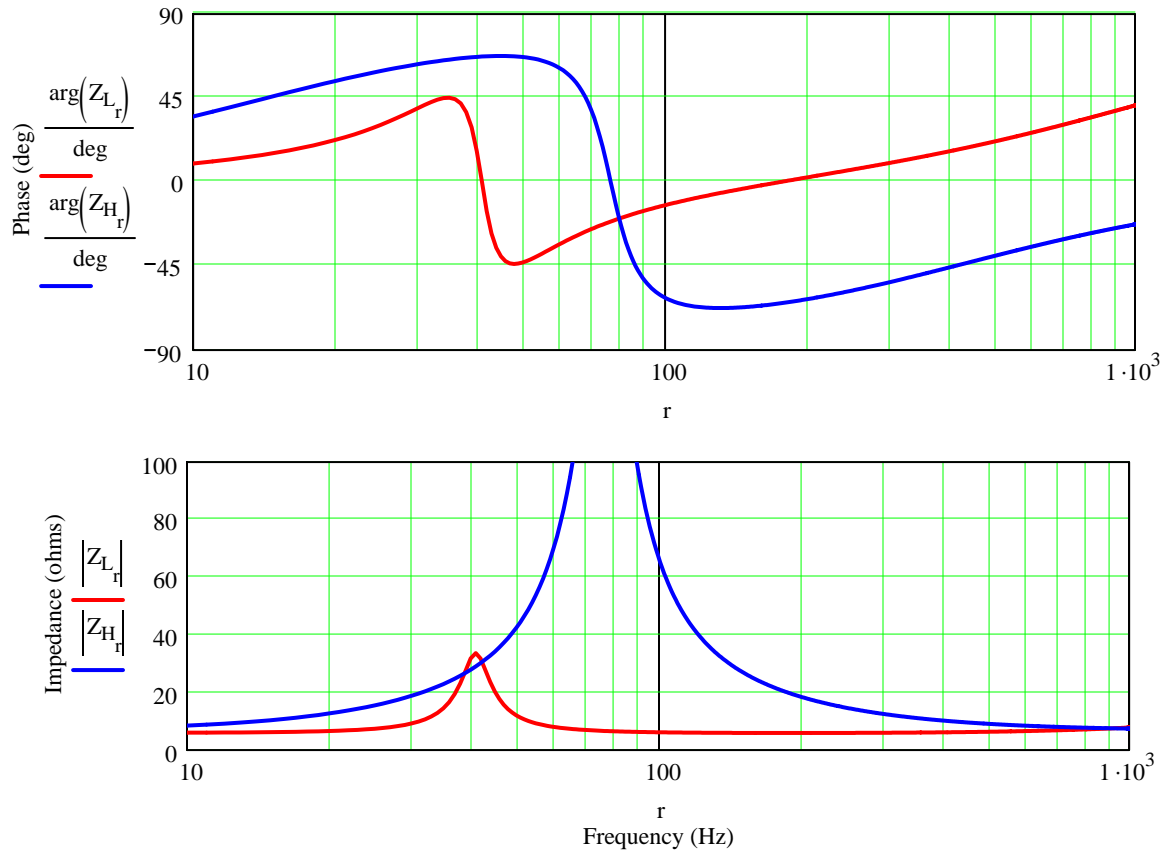

**Driver RMS Displacements** (Red Curve - Woofer, Blue Curve - Extended Range Driver)

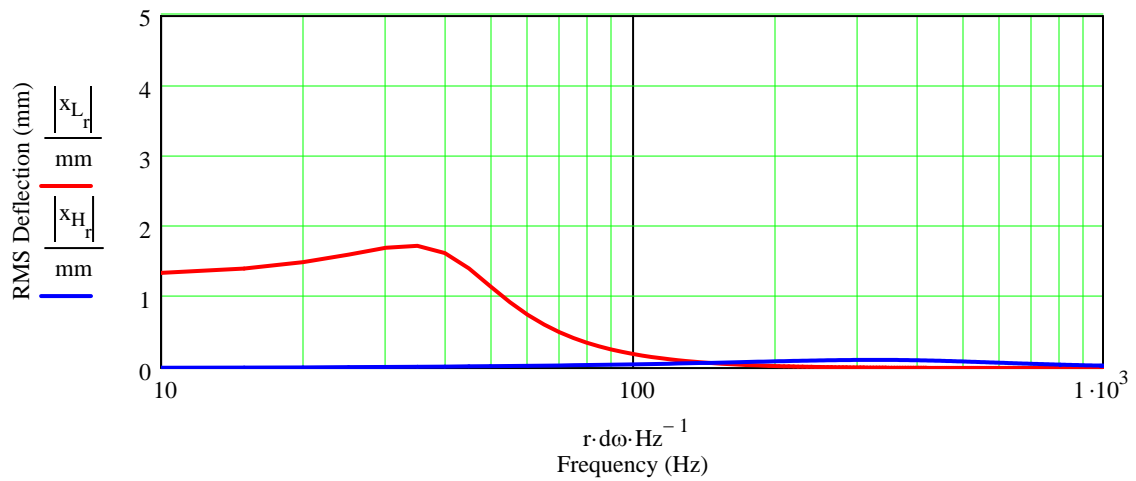

## Part 2 : Detailed SPL Response Calculation

Calculation Includes :

- Position of Drivers on the Baffle.
- Open Baffle Defraction for the Drivers.
- Floor Reflection for the Drivers.

### Geometry

Coordinate System :

- Origin is the lower left corner of the front baffle
- y = horizontal direction
- z = vertical direction

The variables num\_r, n\_low, and n\_high control the number of simple sources used in the calculations. Increasing each will improve accuracy at the expense of longer calculation times. Increase each variable until final plotted SPL stops changing at which point the solution has converged.

### Enclosure Geometry Input

- $X_0 := 2\cdot\text{ft}$  (Front Baffle Distance from Rear Wall > Depth of Enclosure)
- $Y_0 := 1.5\cdot\text{ft}$  (Front Baffle Distance from Side Wall)
- $\theta_0 := 45\cdot\text{deg}$  (Rotation Towards Room Center)
- $Z_0 := 8\cdot\text{ft}$  (Floor to Ceiling Distance)
- stand := 0·m (Height from Floor to Bottom Edge of Front Baffle)
- num\_r := 10 (Number of Points per Unit Length of Baffle Edge)

### Corner Coordinates

- | Y coordinate                  | Z coordinate                  |                       |
|-------------------------------|-------------------------------|-----------------------|
| $y_{o_0} := 20\cdot\text{in}$ |                               | (Bottom Right Corner) |
| $y_{o_1} := 20\cdot\text{in}$ | $z_{o_1} := 38\cdot\text{in}$ | (Top Right Corner)    |
| $y_{o_2} := 0\cdot\text{in}$  | $z_{o_2} := 38\cdot\text{in}$ | (Top Left Corner)     |
| $y_{o_3} := 0\cdot\text{in}$  |                               | (Bottom Left Corner)  |

### Extended Range Driver Geometry Input

- $y_{dc} := 12\cdot\text{in}$  (Driver Center y Coordinate)
- $z_{dc} := 32\cdot\text{in}$  (Driver Center z Coordinate)
- n\_high := 4 (Number of Points Across Diameter)

### Woofers Driver Geometry Input

- $y_{w1} := 10\cdot\text{in}$  (Lower Driver Center y Coordinate)
- $z_{w1} := 10\cdot\text{in}$  (Lower Driver Center z Coordinate)
- n\_low := 10 (Number of Points Across Diameter)

**Listening Position** (Default Location is at 1 m Distance Along the Driver's Axis)

$n\_listen = 0$  (Listening Position Relative to Speaker)  
 $radius := 1 \cdot m$  (Calculation Radius, Effective Radius is Greater if  $y_p$  is Changed from Default)  
 $\theta := 0 \cdot deg$  (0 deg is along the Driver's Axis,  $-80 \text{ deg} < \theta < 80 \text{ deg}$ )  
 $z_p := z_{dc}$  (Default Height is Equal to Driver Height)

$n\_listen = 1$  (Listening Position Relative to the Room Corner)  
 $X_p := 10ft$   
 $Y_p := 7 \cdot ft$   
 $Z_p := z_{dc} + stand$  (Default Height is Equal to Driver Height)  
 $n\_listen := 0$  (Method Selection)

**Floor Condition**


$Reflect := 1$  (0 = hardwood or concrete, 1 = carpeted)

**Reflective Surface Selections** (if 1 reflective surface is included, if 0 reflective surface is removed)

$Inc\_floor := 1$  (Floor,  $Z = 0$ )  
 $Inc\_rear := 0$  (Rear Wall,  $X = 0$ )  
 $Inc\_side := 0$  (Left Side Wall,  $Y = 0$ )  
 $Inc\_ceiling := 0$  (Ceiling)



### Extended Range Driver and Woofer : Simple Source Pattern with Baffle Edge Outline

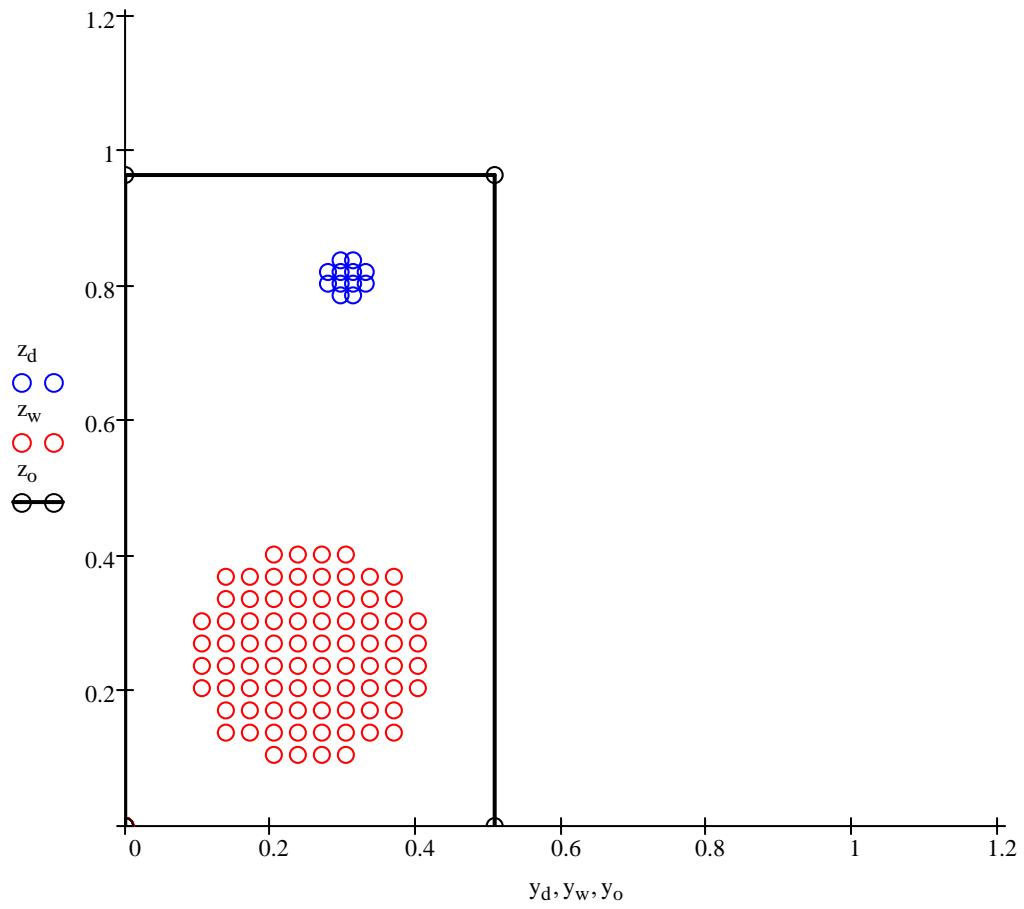





### Three Dimensional View

Axis Length (m) axis := 2 <---- Change value of "axis" to rescale plots


Room Corner is the Origin

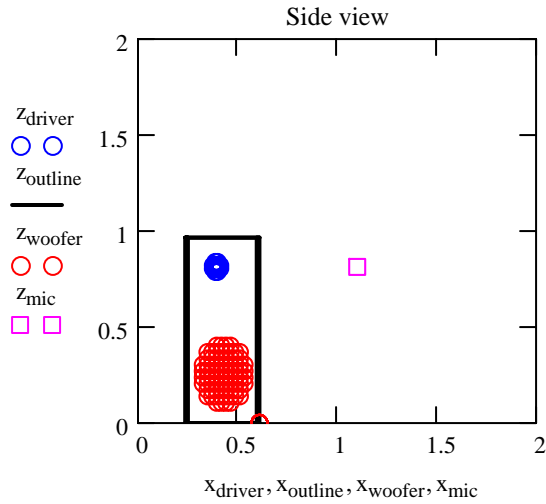

Side View - looking out from side wall

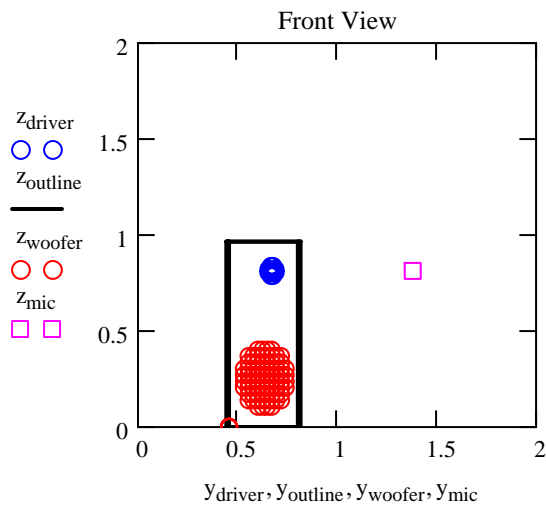




Front View - looking towards rear wall

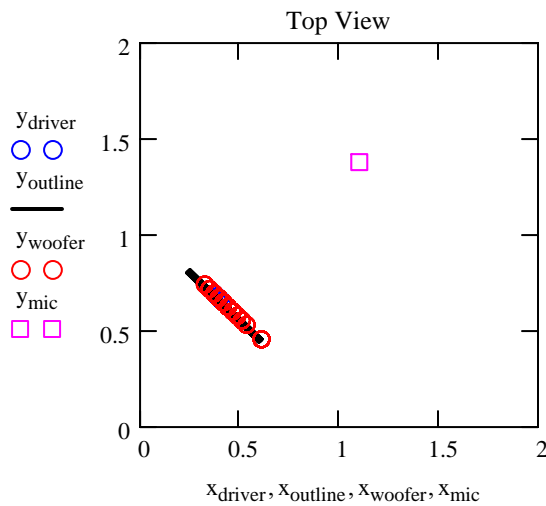

Top View - looking down from ceiling

### Plotted Response for the Extended Range Driver




- Dashed Red - Infinite Baffle Response
- Dashed Magenta - Baffle Response
- Dashed Brown - Crossover Response
- Solid Red - Combined Response

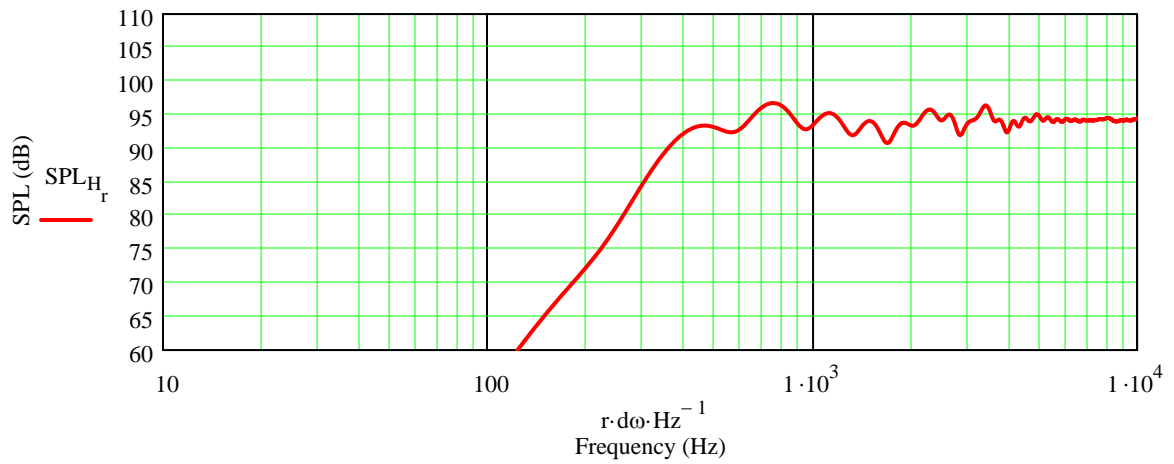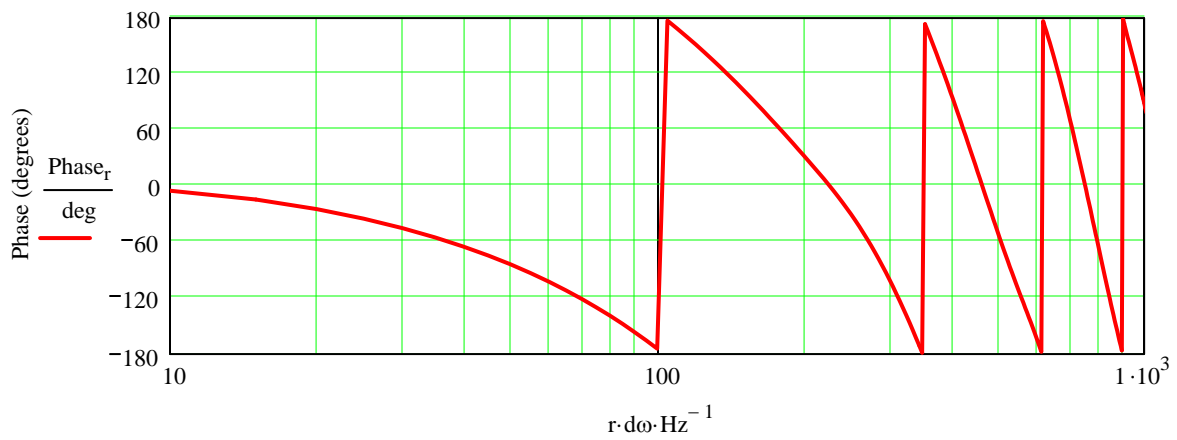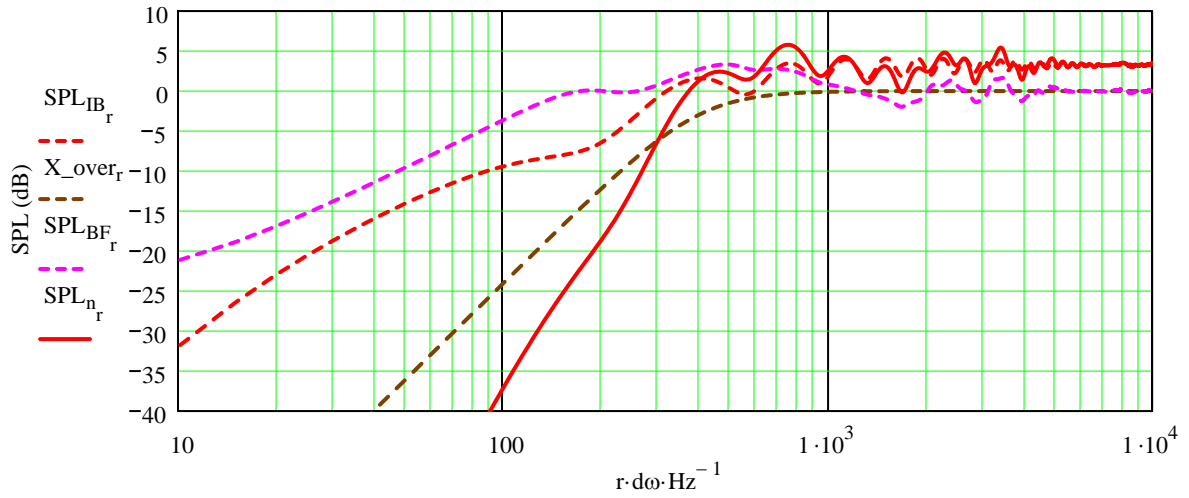





## Plotted Response for the Woofer Driver

Dashed Red - Infinite Baffle Response  
 Dashed Magenta - Baffle Response  
 Dashed Brown - Crossover Response  
 Solid Red - Combined Response

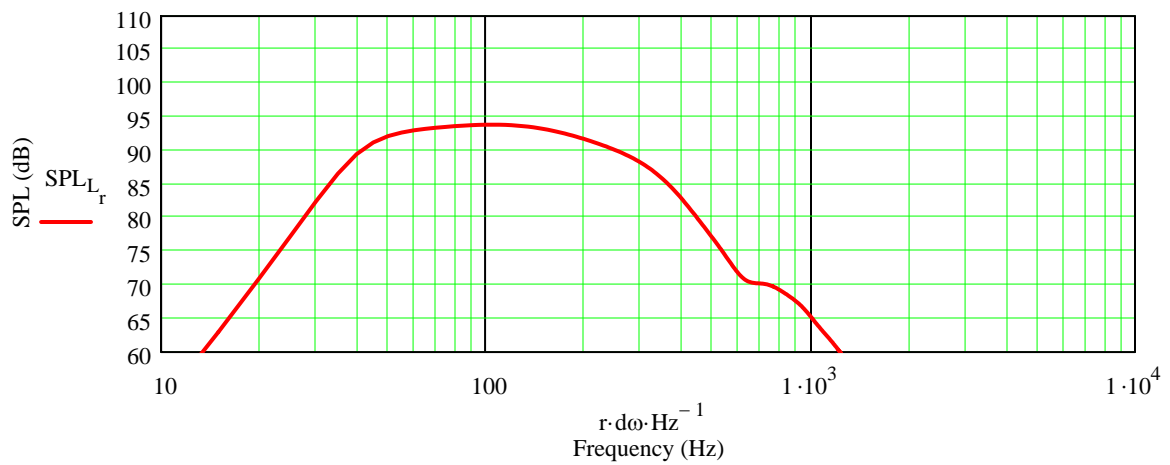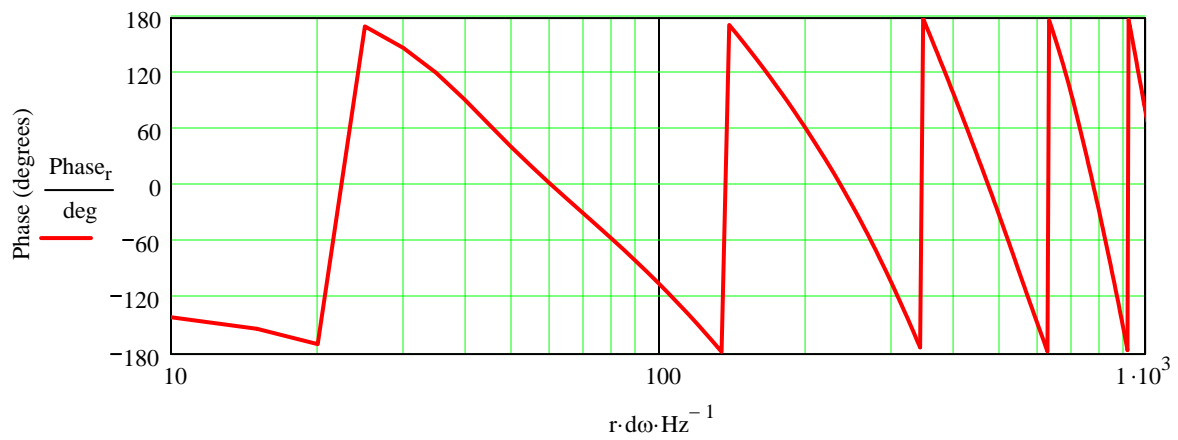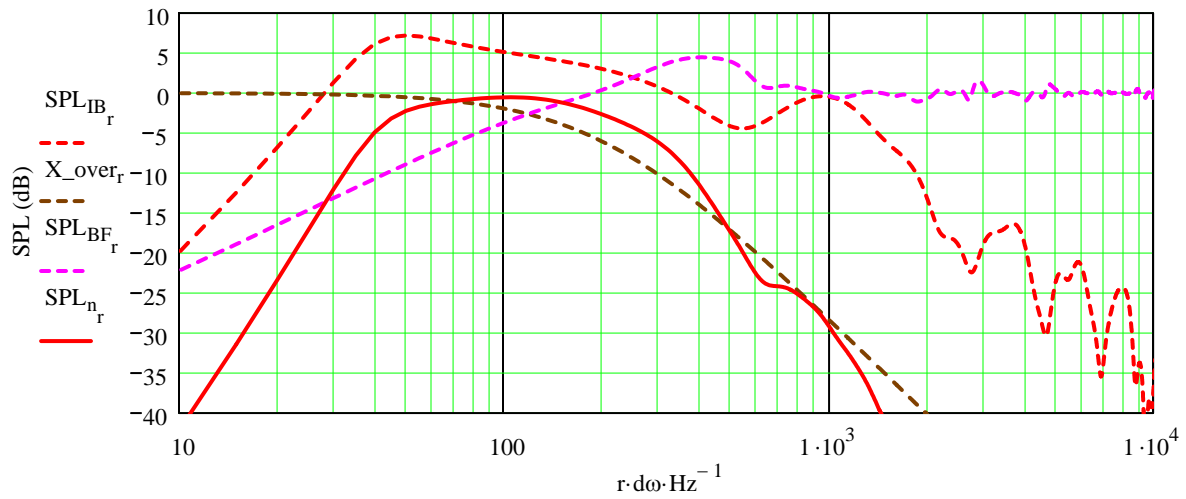

### Plotted System Response for the Extended Range and Woofer Open Baffle Design

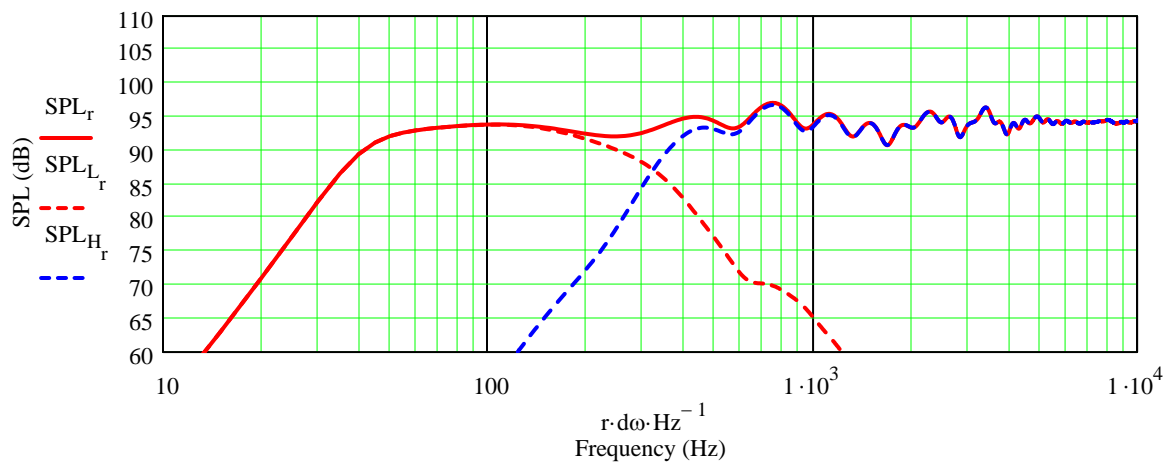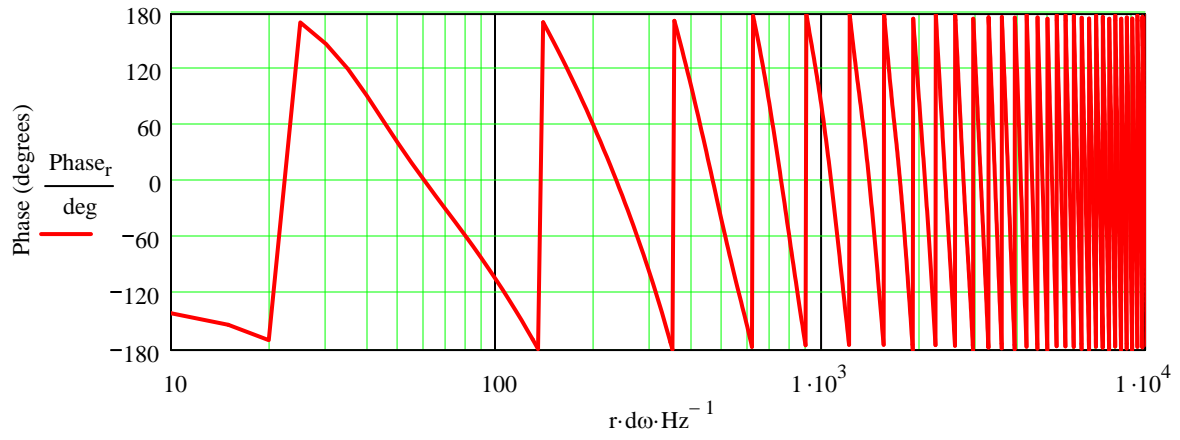

## System Time Response for an Impulse Input

